


RX170Q

Micro ATX (uATX) Motherboard

Intel® Q170 uATX Motherboard supports Intel Kaby Lake/ Skylake Processors

Features

- High Reliability Gold Plating Connectors
- Intel LGA1151 socket supports 6th/7th generation 14nm Intel Kaby Lake¹ / Skylake Core i7/i5/i3 and Celeron processors
- 4 x (Gold Plated) SODIMM slots up to 64 GB Dual Channel DDR4 2133MHz System Memory
- Supports 3 Independent Display
- 2 x DisplayPort (DP++) (Gold Plated), DVI and LVDS
- 1 x PCIe x16 (Gold Plated), 1 x PCIe x4 (Gold Plated), 2 x PCIe x1 Open End (Gold Plated), 1 x Full/Half Size mini-PCIe (Gold Plated) PCIe/ USB, 1 x M.2 Slot (with PCIe x4 / SATA III) Type 2280 and 2260
- Onboard USB: 2 x USB 3.0 (Gold Plated), 4 x USB 2.0 (Gold Plated) and 1 x USB 2.0 (1x5 Connector)
- USB at Rear I/O: 4 x USB 3.0 and 2 x USB 2.0
- 6 x SATA III (Gold Plated), 6 x COM Ports
- Optional TPM 2.0, Intel AMT 11

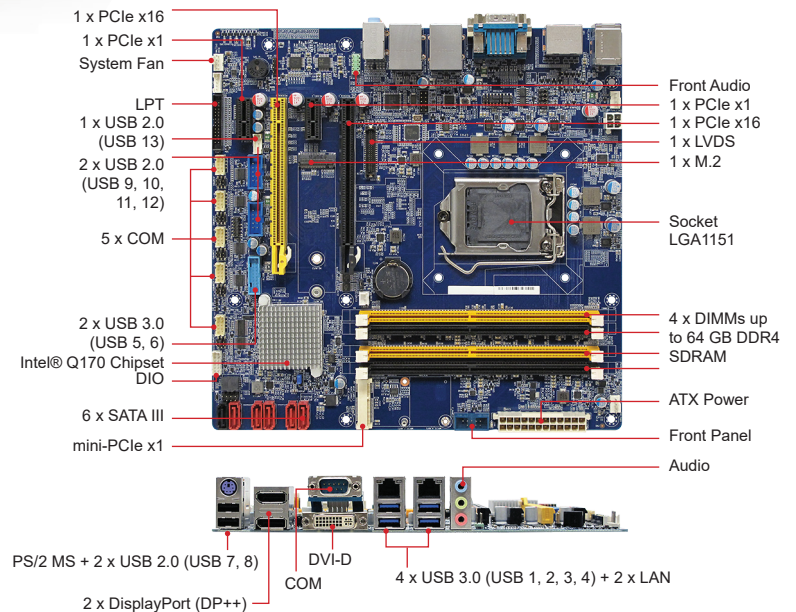

Specifications

System

CPU	Intel LGA1151 socket supports 6th/7th generation 14nm Intel Kaby Lake ¹ / Skylake Core i7/i5/i3 and Celeron processors ¹ Kaby Lake processor support BIOS will be a running change estimated to be in stock starting late Q3/Q4 2017 implementing important new ME code updates. Qual-samples are available now on a limited quantity basis. OS Win 10 and above; support Win 7 with external video cards
System Chipset	Intel® Q170 PCH
System Memory	4 x DIMM (Gold Plated) support up to 64 GB Dual Channel DDR4 2133MHz System Memory Optional ECC Memory Support
Audio Codec	Realtek HD Audio support 7.1 channel sound playback
Ethernet	LAN1: Intel® I219-LM Gigabit Ethernet Controller LAN2: Intel® I210-AT Gigabit Ethernet Controller
BIOS	AMI® 128Mb SPI BIOS
I/O Chip	Nuvoton® NCT6106D or Equivalent
Expansion	1 x PCIe x16 Slot (Gold Plated) (Black) 1 x PCIe x4 Slot (x16 Physical Slot) (Gold Plated) (Yellow) 2 x PCIe x1 Slot Open End (Gold Plated) 1 x Full/Half Size mini-PCIe (Gold Plated) PCIe/ USB 1 x M.2 Slot (with PCIe x4 / SATA III) Type 2280 and 2260
TPM	Optional TPM 2.0
Watchdog Timer	Reset: 1 sec. ~ 255min. and 1sec. or 1min./step
H/W Status Monitor	Monitoring System Temperature, Voltage, with Auto Throttling Control

External I/O

KB/MS	1 x PS/2 Keyboard & Mouse
Audio	Line-in, Line-out, Mic-in
USB	4 x USB 3.0 and 2 x USB 2.0
COM (Serial Port)	1 x RS-232/422/485
LAN	2 x RJ45
Display	2 x DisplayPort (DP++) (Gold Plated), 1 x DVI-D, Optional eDP

Internal I/O

LVDS	1 x 18/24 bits Dual Channel LVDS
USB	1 x 2x10 USB 3.0 Connector (2 x USB Ports) (Gold Plated) 2 x 2x5 USB 2.0 Connector (4 x USB Ports) (Gold Plated) 1 x 1x5 USB 2.0 Connector (1 x USB Port)
COM (Serial Port)	5 x RS-232 Headers with Voltage Selection (2.0mm Pitch Locking Type)
SATA	5 x SATA III Connectors (Red) (Gold Plated) 1 x SATA III Connectors (Black) (Shared with M.2) (Gold Plated)

Display

Graphics Engine	Intel® Integrated Graphic
Display Interfaces	2 x DisplayPort (Gold Plated), 1 x DVI-D, Optional eDP
Display Capability	Supports 3 Independent Display

Audio

HD Codec	Realtek® ALC887 HD Audio
-----------------	--------------------------

Ethernet

LAN1	Intel® i219-LM Gigabit Ethernet Controller
LAN2	Intel® i211-AT Gigabit Ethernet Controller

Mechanical & Environment

Power Requirement	1 x 24-pin ATX Connector (Gold Plated) 1 x 4-pin ATX 12 Connector (Gold Plated) AT/ATX Mode Jumper
Operating Temp.	0 ~ 60°C (32 ~ 140°F)
Storage Temp.	-20 ~ 80°C (-4° ~ 176°F)
Operating Humidity	5%~90% Relative Humidity, Non-condensing
Form Factor	uATX (Micro ATX)
Dimensions	9.6" (L) x 9.6" (W)
Certification Information	CE, FCC Class B
Weight	1.45 lbs

* All product specifications and images are subject to change without notice.
Last update: 10/5/2023