

Features

- PICMG@COM Express® Revision 3.0 supports Type 10 Mini modules
- 1 x LVDS, 1 x eDP, 1 x DP, 1 x HDMI
- Audio Interface MIC IN, Line OUT
- 1 PCIe x 4 Slot
- Type 10 Pin-out




Specifications


System	
Form Factor	mini-ITX
External I/O	
Expansion	1 x PCIe x4
Video	1 x LVDS 1 x eDP 1 x DP 1 x HDMI
USB	2 x USB 3.1 (Gen1, contain 2 x USB2.0) 6 x USB2.0
SATA	2 x SATAIII
DIO	1 x 8bit GPIO
Audio	2 x Audio Jack (MIC In & Line Out)
Audio Codec	ALC892
Other	1 x SDIO1x SDIO/DIO (optional, depend on module board) 1 x LAN

Mechanical & Environment	
Power Type	ATX
Operating Temperature	Standard: 0°C to 60°C (32°F ~ 140°F)
Storage Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Operating Humidity	0% ~ 90% Relative Humidity, Non-condensing
Dimensions	6.7" x 6.7" (170mm x 170mm)
Weight	0.88 lbs (0.4kg)
Certification	CE, FCC Class B

Expansion board for 4 LAN Ports

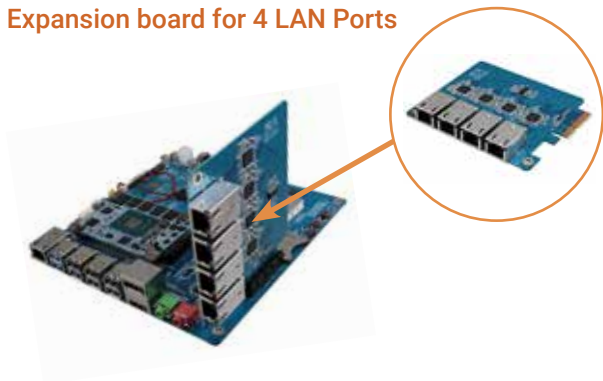

Expansion board for 4 PCIe

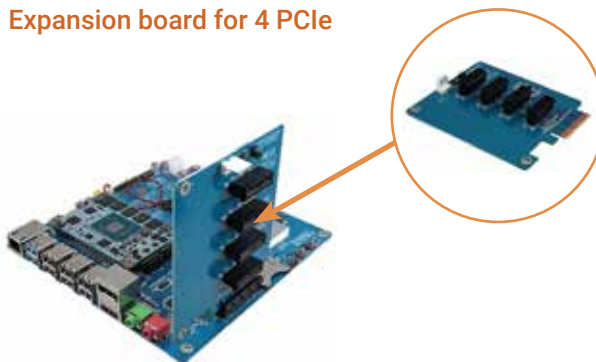

Ordering Info

EEV-EX15-A1R MiniITX Ev. Board for COMe Type 10 A1 (with 2 expansion boards & I/O shield)

* All product specifications and images are subject to change without notice. Last update: 1/24/2019