


ESM-APLC

Compact COM Express Module

Intel® Celeron® N3350 / Pentium® N4200 / Atom™ E Series SoC Processor Type6 COMe Compact

Features

- Onboard Intel® Celeron®N3350 / Pentium® N4200 / Atom™ E Series SoC BGA Processor
- 1 204-pin So-DIMM socket supports up to 8GB DDR3L 1866 SDRAM
- Supports Dual Channel 18/24 bit LVDS, Display Port, HDMI, VGA, eDP (Optional)
- Intel I211 Gigabit Ethernet
- 2 SATA 3.0, 8 USB 2.0, 4 USB 3.0, 8-bit GPIO
- HD Audio Interface
- 9~19V Wide Range Power Input
- Type 6 Rev 2.1 Pin-out
- Compact Size: 3.7" x 3.7" (95mm x 95mm)

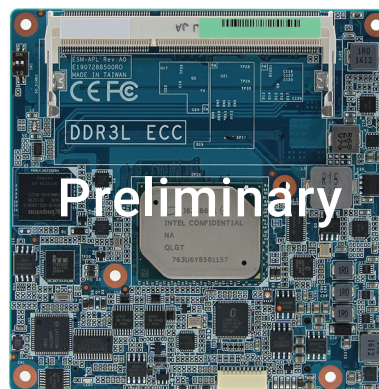

Specifications

System

CPU	Intel® Pentium® N4200 4C 2.5 GHz processor Intel® Celeron® N3350 2C 2.3 GHz processor Intel® Atom™ x7-E3950 4C 2.0 GHz High Sku processor Intel® Atom™ x5-E3940 4C 1.8 GHz Intermediate SKU processor Intel® Atom™ x5-E3930 2C 1.8 GHz Entry SKU processor
-----	--

BIOS	AMI uEFI BIOS, 128Mbit SPI Flash ROM
------	--------------------------------------

System Chipset	Apollo Lake SoC Integrated
----------------	----------------------------

System Memory	1 x 204-Pin DDR3L 1866 So-DIMM supports up to 8 GB
---------------	--

Expansion	3 x (Optional 4 PCIe x1 or 1 PCIe x4 while removing Ethernet), compliant to PCIe Gen2 5.0 GT/s
-----------	--

I/O Chip	ITE IT8528VG
----------	--------------

OS Support	Win 10, Win 8.1, Win 7, Linux
------------	-------------------------------

Display

Chipset	Apollo lake SoC integrated Graphics
---------	-------------------------------------

Resolution	VGA: Max. resolution 1920x1200 @ 60Hz LVDS: Max. resolution 1920x1200 @ 60Hz HDMI: Max. resolution 3840x2160 @ 30Hz DP: Max. resolution 4096x2160 @ 60Hz
------------	---

Multiple Display	HDMI DP DisplayPort
------------------	---------------------------

LCD Interface	CH7511B (eDP to LVDS)
---------------	-----------------------

Onboard I/O

MIO	2 x SATA III, 1 x 8bit GPIO, 1 x SMBus, 1 x LPC, 1 x I2C
-----	--

USB	8 x USB 2.0, 4 x USB 3.0
-----	--------------------------

Other	1 x UART
-------	----------

Audio

HD Codec	Intel® High Definition Audio
----------	------------------------------

Audio Interface	Line-out, Line-in, Mic-in
-----------------	---------------------------

Ethernet

LAN Chip	1 x Intel WGI211AT
----------	--------------------

Ethernet Interface	10/100/1000 Base-Tx Gigabit Ethernet Compatible
--------------------	---

Mechanical & Environment

Power Requirement	+9V ~ +19V
-------------------	------------

ACPI	Single power ATX Support S0, S3, S4, S5 ACPI 3.0 Compliant
------	---

Power Type	AT/ATX
------------	--------

Operating Temp	0°C ~ 60°C (32°F ~ 140°F)
----------------	---------------------------

Storage Temp	-40°C ~ 75°C (-40°F ~ 167°F)
--------------	------------------------------

Operating Humidity	0% ~ 90% Relative Humidity, Non-condensing
--------------------	--

Certification	CE FCC Class B
---------------	-------------------

Form Factor	COM Express Modules
-------------	---------------------

Dimensions (L) x (W)	3.7" x 3.7" (95mm x 95mm)
----------------------	---------------------------

Weight	0.44 lbs (0.2kg)
--------	------------------

* All product specifications and images are subject to change without notice.
Last update: 4/26/2017