


MX170QD

Intel Q170 mini-ITX motherboard supports 6th/7th Generation 14nm Intel Kaby Lake/ Skylake Core i7/i5/i3 Processors

Features

- High Reliability Gold Plating Connectors
- Intel LGA1151 socket supports 6th/7th generation 14nm Intel Kaby Lake¹ / Skylake Core i7/i5/i3 and Celeron processors
- 2 x (Gold Plated) SODIMM slots support up to 32 GB Dual Channel DDR4 system memory
- Supports 3 Independent Displays
- 2 x DP (Gold Plated), 1 x HDMI (Gold Plated), 1 x LVDS4 x SATA III (Gold Plated), 4 x USB 2.0 (Gold Plated), 6 x USB 3.0 (Gold Plated), 2 x COM Ports
- 1 x PCIe x16 (Gold Plated), 1 x mini-PCIe (Gold Plated) with SATA III support, 1 x M.2 (Gold Plated) (2280 or 2242)
- iAMT 11.0, TPM 2.0
- Kaby Lake processors support OS Win 10 and above; support Win 7 with external video cards

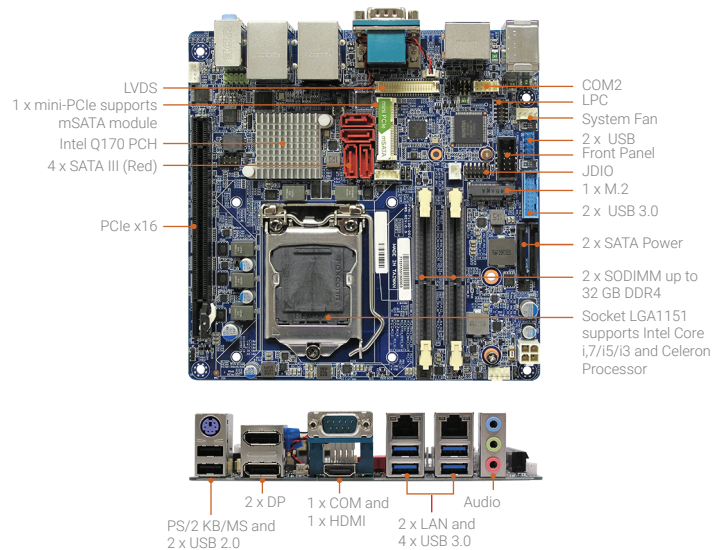

Specifications

System	
CPU	Intel LGA1151 socket supports 6th/7th generation 14nm Intel Kaby Lake ¹ / Skylake Core i7/i5/i3 and Celeron processors
System Chipset	Intel® Q170 PCH
System Memory	2 x (Gold Plated) SODIMM slots support up to 32 GB Dual Channel DDR4 2133 MHz vertical type memory sockets
Audio	Realtek ALC892/887 HD Audio
Ethernet	LAN1: Intel® i219-LM Gigabit Ethernet Controller LAN2: Intel® i211-AT Gigabit Ethernet Controller
BIOS	128Mb SPI BIOS
I/O Chip	Nuvoton NCT6106D
Watchdog Timer	H/W Reset, 1sec. ~ 65535sec.
H/W Status Monitor	Monitoring System Temperature and Voltage with Auto Throttling Control
Expansion	1 x PCIe x 16 Slot (Gold Plated) 1 x Full/Half Size mini-PCIe (mSATA III Support) (Gold Plated) 1 x M.2 Slot (Gold Plated) (Support 2280 and 2242)
TPM	TPM 2.0

Display	
Chipset	Intel Integrated HD Graphic
Resolution	HDMI Max Resolution: 4096x2160@24Hz DP Max Resolution: 4096x2304@60Hz LVDS Max Resolution: 1920x1200@60Hz * Max resolution depends on how many displays are active One Panel Display: 4096 x 2304 @ 60 Hz Two Panel Displays Concurrently: 2880 x 1800 @ 60 Hz Three Panel Displays Concurrently: 2304 x 1440 @ 60 Hz

Display Output	Supports 3 Independent Displays
----------------	---------------------------------

External I/O	
KB/MS	1 x PS/2 Mouse
Audio	Line-in, Line-out, Mic-in
USB	4 x USB 3.0 and 2 x USB 2.0 Connectors
COM	1 x DB-9 RS-232/422/485 Connector (Gold Flashed)
LAN	2 x RJ-45
HDMI	1 x HDMI Connector (Gold Plated)
DisplayPort	2 x DisplayPort Connectors (Gold Plated)

Internal I/O	
LVDS	1 x 18/24 bits Dual Channel LVDS
USB	1 x USB 2.0 Headers (2 Ports Total) (Gold Plated) 1 x USB 3.0 Header (2 Ports Total) (Gold Plated)
COM	1 x RS-232 (with Voltage Selection) (Gold Flashed)
SATA	4 x SATA III and SATA Power Connectors (Gold Plated)
DC-in	1 x 4-pin DC-in (Gold Plated)
MIO	1 x 8-bit GPIO, 1 x LPC, 1 x SPI, 1 x Front Audio, 1 x Front Panel (Gold Plated), 1 x 4-pin CPU Fan, 1 x 4-pin Chassis Fan, 1 x Cable Type CMOS Battery, 1 x Backlight Locking (Gold Flashed), 1 x Chassis Intrusion Locking Type Header (Gold Flashed)

Mechanical & Environment	
Power Type	12V, 16 - 24V DC
Operating Temp	0°C ~ 60°C
Storage Temp	-20 ~ 80°C
Operating Humidity	5% ~ 90% Relative Humidity, Non-condensing
Storage Humidity	5% ~ 90% Relative Humidity, Non-condensing
Form Factor	Mini ITX
Dimensions	6.7" (L) x 6.7" (W)

Ordering Info	
MX170QD	Intel Q170 Mini ITX Motherboard with DC Power
Accessory	1 x I/O Shield, 1 x DC in power cable, 1 x SATA Power Cable
183000000006	2.00mm pitch 12" length Serial cable
182437200040	2.54mm pitch 14" length Dual port USB cable w/ full height bracket. (USB 2.0)

* All product specifications and images are subject to change without notice. Last update: 02/08/2018



BCM Advanced Research

11 Chrysler, Irvine, CA 92618 USA
An industry leader in industrial motherboards & embedded computing

www.bcmcom.com

BCMSales@bcmcom.com
(949) 470-1888